

The **MHR5700** magnetic hall **dual output** rotary position sensor is designed for critical applications where error detection is an important consideration.

The sensing module is manufactured with an aluminium case and is paired with the option of either a threaded bolt or free magnet to allow integration in to the customer's application. Mounted separately from the sensing module, they provide the advantage of no mechanical linkages.

Manufactured to quality standards expected for high performance measurement, they are specified extensively in both industrial and automotive control systems.

To ensure these sensors meet the exacting requirements of the customer, the measurement angle is factory programmed between 20° to 360° in 1° increments.


They are fully encapsulated to be environmentally protected against the ingress of dust and water to IP68/IP69K.

Key features and benefits

- Dual channel with three different standard output options
- Compact sensing module with separate magnet
- Electrically isolated redundant outputs
- Programmable measurement range available from 20° to 360° in 1° increments
- Maximum operating temperature 150°C (302°F)
- Suitable for high dither vibration applications
- Superior non-linearity of $<\pm 0.25$ %FS
- Sensor operates from either 5 VDC or 8 to 30 VDC
- Sealed to IP68/IP69K
- Custom outputs and designs available on request



MHR5741 and MHR5742 - Flange mounting with magnet options

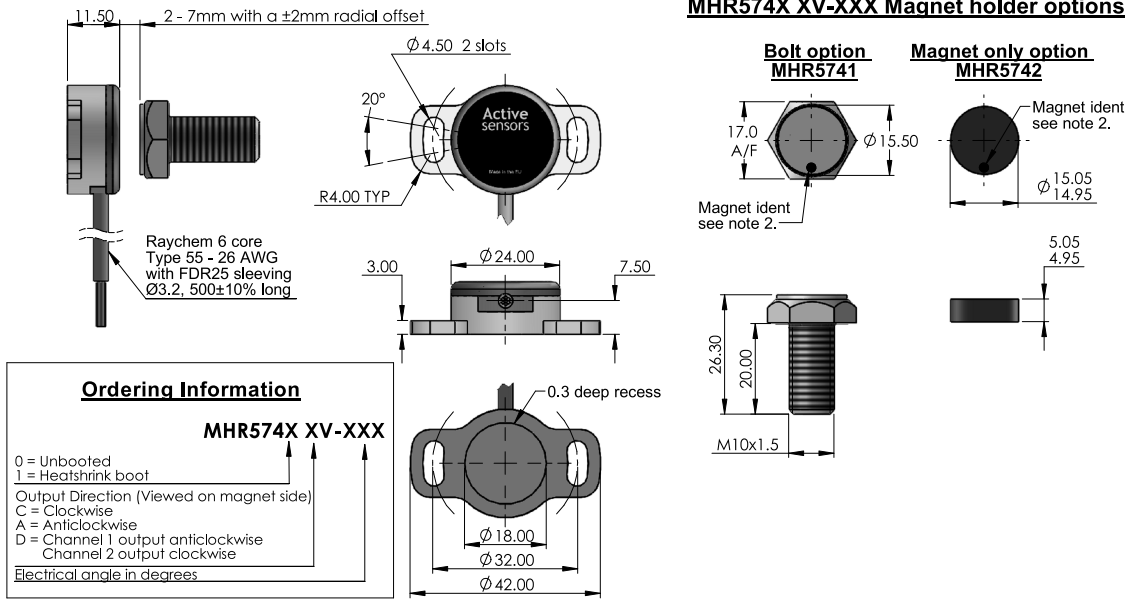

Ordering Information

MHR574X XV-XXX

0 = Unbooted
 1 = Heatshrink boot

Output Direction (Viewed on magnet side)
 C = Clockwise
 A = Anticlockwise
 D = Channel 1 output anticlockwise
 Channel 2 output clockwise

Electrical angle in degrees


Input Specification			
Supply voltage (Vs)	5.0±10% regulated	8 to 30 unregulated	VDC
Over voltage protection	Up to 50		VDC
Supply current	<15		mA
Reverse polarity protection	Up to -10		VDC
Power on settlement time	<100		ms
Input voltage rise time	0.25 minimum		V/ms
Output Specification			
Output type	Analogue voltage		
Output direction	Clockwise or anticlockwise (specified at time of order)		
Voltage output (Vout)	0-Vs (+5)	0 - 5.0	VDC
Line regulation	Ratiometric with Vs	<0.01% FS	
Monotonic range	Linear Range (see note 6)		
Load resistance	>10K		Ohms
Output noise	<5		mV RMS
Performance Specification			
Measurement range	20 to 360 in 1° increments		
Resolution	0.025		% of measurement range
Non-Linearity (see note 5)	<±0.25		%FS
Phasing (see note 6)	<0.5		%FS
Temperature coefficient (Vout)	<±0.003	<±0.011	%FS/°C
Update rate	500 Nom		Hz
Max operating speed	600		RPM
General Specification			
Weight (approx.)	30		grams
Protection/sealing	Electronic housing IP68 and IP69K		
Life (shaft bearing)	>500 million cycles		dependent on environment
Dither life	Contactless - no degradation due to shaft dither		
Operational temperature	-40 to +150		°C
Storage temperature	-55 to +150		°C
Materials	Case - Aluminium 6082 Top Cap - GF polymer Bolt option - Stainless steel 316		

- Notes:
1. Incorrect wiring may cause internal damage.
 2. When shaft marking is facing cable exit, instrument is mid-travel (2.5V output).
 3. Do not operate between 5.5V and 8V.
 4. Non-linearity is calculated from least squares best fit method over the Linear Range.
 5. Phasing for the MHR574X DV-XXX option is at mid-travel only.
 6. Linear Range = Measurement Range x 0.995 Nom.
 7. Due to hall effect technology used in this device, ferrous materials and magnetic fields close to the sensor may influence output.
 8. General dimension tolerance is ±0.25.


Electrical connection (see note 1)

	Wire Colour	Function
Channel 1	Red	Supply Voltage (Vs)
	White	Output Voltage (Vout)
	Black	Ground
Channel 2	Blue	Supply Voltage (Vs)
	Yellow	Output Voltage (Vout)
	Green	Ground

Typical output



Input voltage de-rating graph



Europe
 Active Sensors Ltd.
 Unit 12, Wilverley Road
 Christchurch, Dorset
 BH23 3RU, UK
 +44 (0)1202 480620



North America
 Active Sensors Inc.
 8520 Allison Point Blvd, Suite 220
 Indianapolis
 IN 46250, USA
 +1 317 713 2973